**Characteristic**

- 19" TFT LED panel
- High temperature five-wire resistive touch screen
- Optional Intel® Celeron® or Core processor
- Aluminum alloy shell, compact fanless design
- Front panel protection class IP65
- Supports full-size Mini PCIe expansion
- Supports USB 3.0
- Support for Windows Embedded and LINUX
- Support VESA 75


Overview

This product is a cost-effective LCD industrial panel computer, which can choose Intel® Celeron® or Core processor, and the compact embedded system can provide high-performance computing. High durability design, front panel protection level IP65, high temperature five-wire resistive touch screen, supports multiple interfaces to meet various industrial applications.

Specification

Processor	CPU	Intel® Celeron® J1900
	Frequency	2.00GHz
	L2 cache	2MB
	Memory	1 x SO-DIMM, DDR3L 1333, Maximum support 8 GB
	Storage	1 x 2.5" SATA Bay, 1 x mSATA Bay
	Network (LAN)	1 x 10/100/1000 Mbps Ethernet
	I/O Interface	3 x RS232
	Expand	1 x Full-size Mini PCIe slot
	watchdog timer	255 levels
Physical properties	Size	460.3 x 282.4 x 54.5 mm
	Weight	4.5 Kg
OS	Operating system	Windows 7 32bit&64bit / Windows 8.1 32bit&64bit Windows 10 32bit&64bit/WES7/Linux
Power consumption	Input voltage	12 Vdc
	Power consumption	25W
LCD display	Display type	19" TFT LCD (LED Backlight)
	Resolution	1366 x 768
	angle of view	80 (left), 80 (right), 60 (top), 60 (bottom)
	brightness(cd/m2)	250
	contrast	1000
	Backlight life	30,000 hours (Min.)
Touch screen	Type	High temperature five-wire resistive touch screen
	Transmittance	80±5% at 550 nm wavelength
	controller	USB interface
	Durability (number of touches)	≥ 35 million times
Environment	Operating temperature	0 ~ 50°C with SSD 0 ~ 40°C with HDD
	Storage temperature	-20 ~ 60°C
	Relative humidity	10 ~ 95% @ 40°C (non-condensing)
	EMC	CCC
	Safety	CCC
	Front panel protection	IP65 standard

A13 PA-190TPC-CE5B

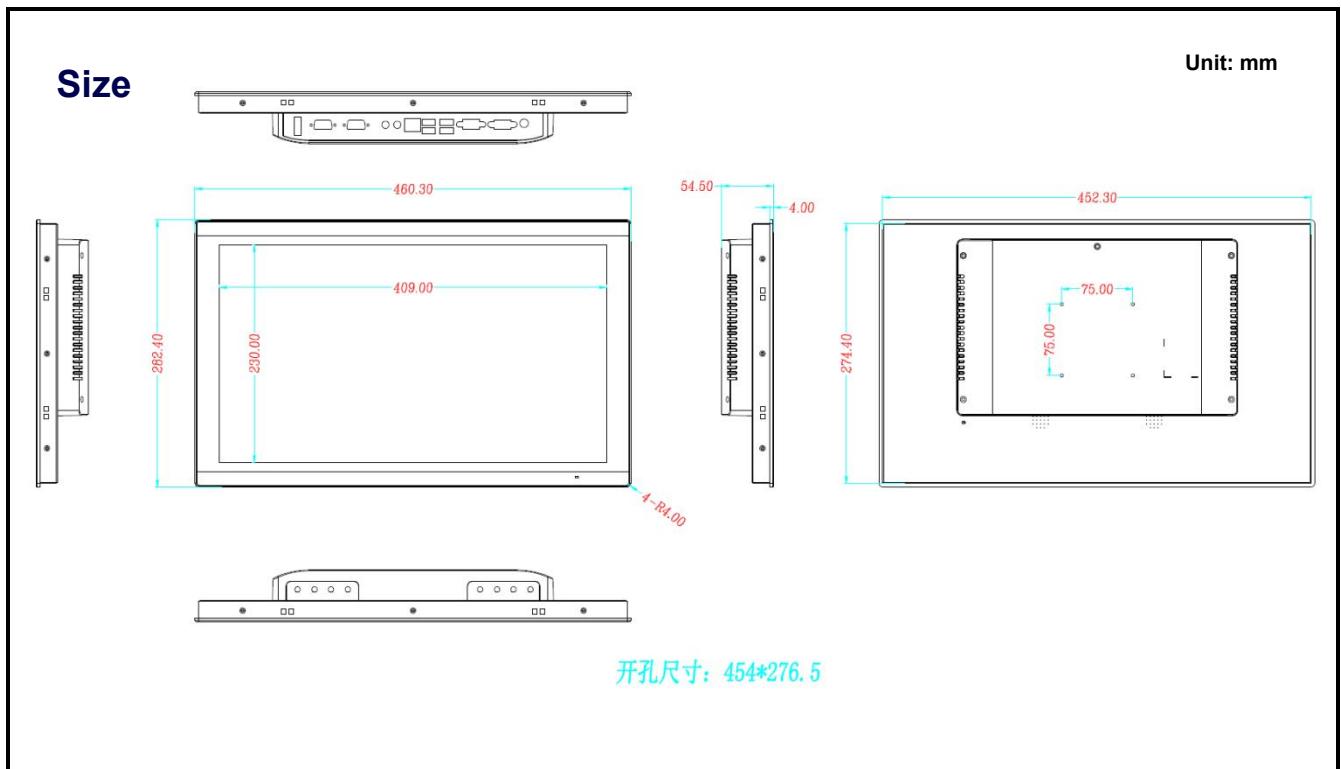


Ordering Information

Parts No	Description
A13 PA-190TPC-CE5B (19)	Intel Celeron J1900
A13 PA-190TPC-CE5B (64)	Intel Celeron J6412
A13 PA-190TPC-CE5B (I3)	Intel Core i3 CPU (optional 3/4/6 generation/or higher)
A13 PA-190TPC-CE5B (I5)	Intel Core i5 CPU (optional 3/4/6 generation/or higher)
A13 PA-190TPC-CE5B (I7)	Intel Core i7 CPU (optional 3/4/6 generation/or higher)
A13 PA-ARM-1	VESA standard wall mount bracket
A13 PA-ACW-1	WIFI module with antenna
A13 PA-ACW-2	Full Netcom 4G data communication module with antenna

*For other configurations, please contact the business specialist for consultation!

J1900 I/O Interface

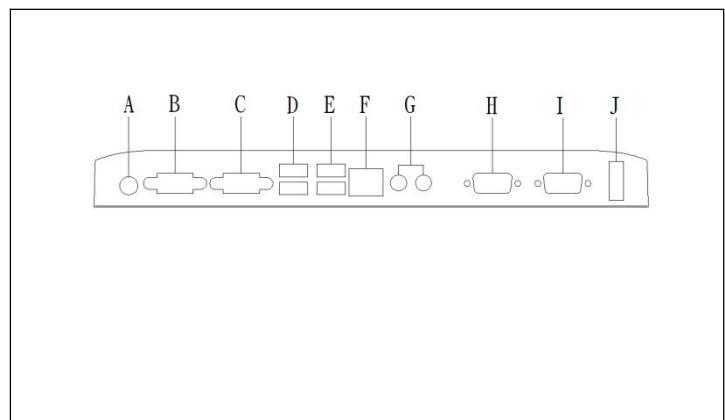

- | | |
|-----------------------------|-----------------|
| A. DC-In (12V) | F. RJ45 LAN |
| B. VGA | G. AUDIO |
| C. COM1(RS-232) | H. COM2(RS-232) |
| D. 1 x USB 2.0, 1 x USB 3.0 | I. COM3(RS-232) |
| E. 2 x USB 2.0 | J. POWER_SW . |

*There may be differences in other configuration I/O interfaces, please contact the business specialist for confirmation !